

Lifts



Cabin operating panels **BC-COP**

With our new BC-NELA control system, we supply cabin operating panels of our own production according to customer's specifications. We offer completely new wall-mounted operating panels with two display sizes and an optional surface finish.

Design options

- Installation type: wall-mounted, wall-mounted with frame, flat (full-cabin).
- Dimension: standard wall-mounted, mini wall-mounted, according to the customer.

Available configurations

- Display size: 9" or 5".
- Backlight colour, button shape, etc...
- Logo on customer request.



5" DISPLAY 9" DISPLAY

Examples of standard cabin control panel layouts

BC-COP



BC-COP-SLIM



BC-COP



BC-COP

BETACONTROL

Beta Control s.r.o.
Cerneho 829/58, 635 00 Brno-Bystrc
Czech Republic

www.betacontrol.eu
sales@betacontrol.cz

Technical data of cabin panels



Installation type	Dimensions (height, width, depth; mm)	Material	Size of installation hole (mm)
Standard wall-mounted	1269 × 320 × 34	Brushed stainless steel, gloss, structure, Komaxit according to RAL	1235 × 253
Slim wall-mounted	1269 × 320 × 21	Brushed stainless steel, gloss, structure, Komaxit according to RAL	160 × 160
Mini wall-mounted	1000 × 320 × 34	Brushed stainless steel, gloss, structure, Komaxit according to RAL	966 × 253
Full-cabin	according to the cabin type	according to the cabin type	according to the cabin type

Cabin panels type marking

BC-COPpp.wL x y a b c d e f.MECH/r s t u v w

CABIN PANEL DESIGNATION

NUMBER OF STATIONS

COLOUR DESIGN

WL – White Line (white)
BL – Blue Line (blue)
CL – Custom Line (custom design)

INSTALLATION

S – wall-mounted (on the cabin surface)
F – flat (in the cabin wall)

DIMENSIONAL SPECIFICATIONS

C – full-cabin
N – standard

DOOR CONTROL

1 – only an OPEN DOOR button
2 – OPEN DOOR and CLOSE DOOR buttons
3 – an OPEN DOOR + STOP button

BUTTON DESIGN

0 – round button
1 – angular button
2 – round button (different manufacturer)
3 – angular button (different manufacturer)

FAN FITTING

0 – no fan
1 – fan outside the COP with automatic activation
2 – fan inside the COP with automatic activation
3 – fan inside the COP with manual activation – with a button
4 – fan outside the COP with manual activation – with a button

EXACT SPECIFICATION FOR CONSTRUCTION AND PRODUCTION

TYPE OF MECHANISM

S52 – BC-COP-SYN (LCD 5")
S92 – BC-COP-SYN (LCD 9")
SL52 – BC-COP-SYN slim (LCD 5")
SL92 – BC-COP-SYN slim (LCD 9")
SM52 – BC-COP-SYN mini (LCD 5")
SM92 – BC-COP-SYN mini (LCD 9")
5.EMB2 – BC-COP-SYN (LCD 5")
9.EMB2 – BC-COP-SYN (LCD 9")
 according to the customer specification

TYPE OF MECHANISM (WITH FRAME)

SS52 – BC-COP-SYN (LCD 5")
SS92 – BC-COP-SYN (LCD 9")
SMS52 – BC-COP-SYN mini (LCD 5")
SMS92 – BC-COP-SYN mini (LCD 9")

VIDEO FRAME

0 – without videoframe
1 – with videoframe

CONTROLLERS WITH A KEY SWITCH

0 – without keys
1 – evacuation ride
2 – priority ride
3 – hospital ride
4 – open door loc
5 – evacuation ride + open door locking
6 – priority ride + open door locking
7 – evacuation ride + priority ride + open door locking
8 – enabling options (button activation)

DEVICE FOR ENABLING OPTIONS

0 – without a reader
1 – Dallas reader (BC)
2 – RFID reader (BC)
3 – Customer

BETACONTROL

Beta Control s.r.o.
 Cerneho 829/58, 635 00 Brno-Bystrc
 Czech Republic

www.betacontrol.eu
sales@betacontrol.cz



Co-funded by
the European Union



Landing operating panels **BC-LOP**

For our lift systems we offer operation panels of our own production in various designs according to the customer specification. You can combine the most suitable type for your order according to your own concept


Basic division

- by type: surface, flat, wall- by backlight
- colours: blue line and white line
- other specifications: display type, number of buttons, etc.

Configuration Options

Customers can themselves specify their own requirements according to the type marking outlined below.

Examples of standardly supplied operating panels

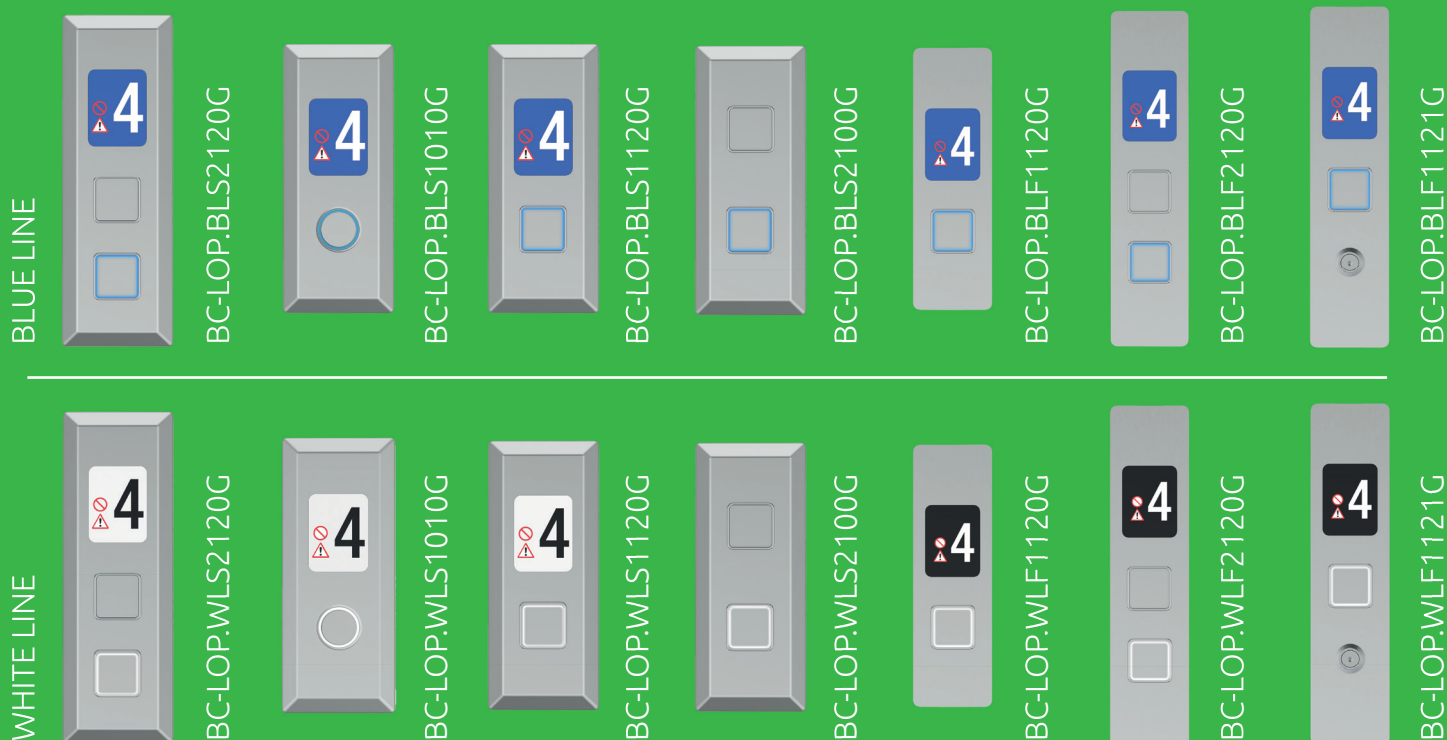


Technical data of the operating panels



Type / Usage	Dimensions var. 1thickness + display (height, width, length; mm)	Dimensions var. 2thickness + display (height, width, length; mm)	Material	Dimensions of the installation hole (mm)	Installation method	Screw pacing (mm)
Wall	193 x 79 x 27	264 x 79 x 27	1.4301 AISI 304, stainless steel, surface finish BALOTINA	no	Surface mounting of the operating panel of the bracket	no
Doorframe	200 x 60 x 2	200 x 60 x 2	1.4301 AISI 304 2G (GRADE 180), ground stainless steel; grinding degree 180	135 x 52 x 40	Mounting to the doorframe by means of nuts M4	150
To the wall	200 x 60 x 2	200 x 60 x 2	1.4301 AISI 304 2G (GRADE 180), ground stainless steel; grinding degree 180	135 x 52 x 40	Mounting the bricked box by screws M4x16	150

Type marking of the operating panels

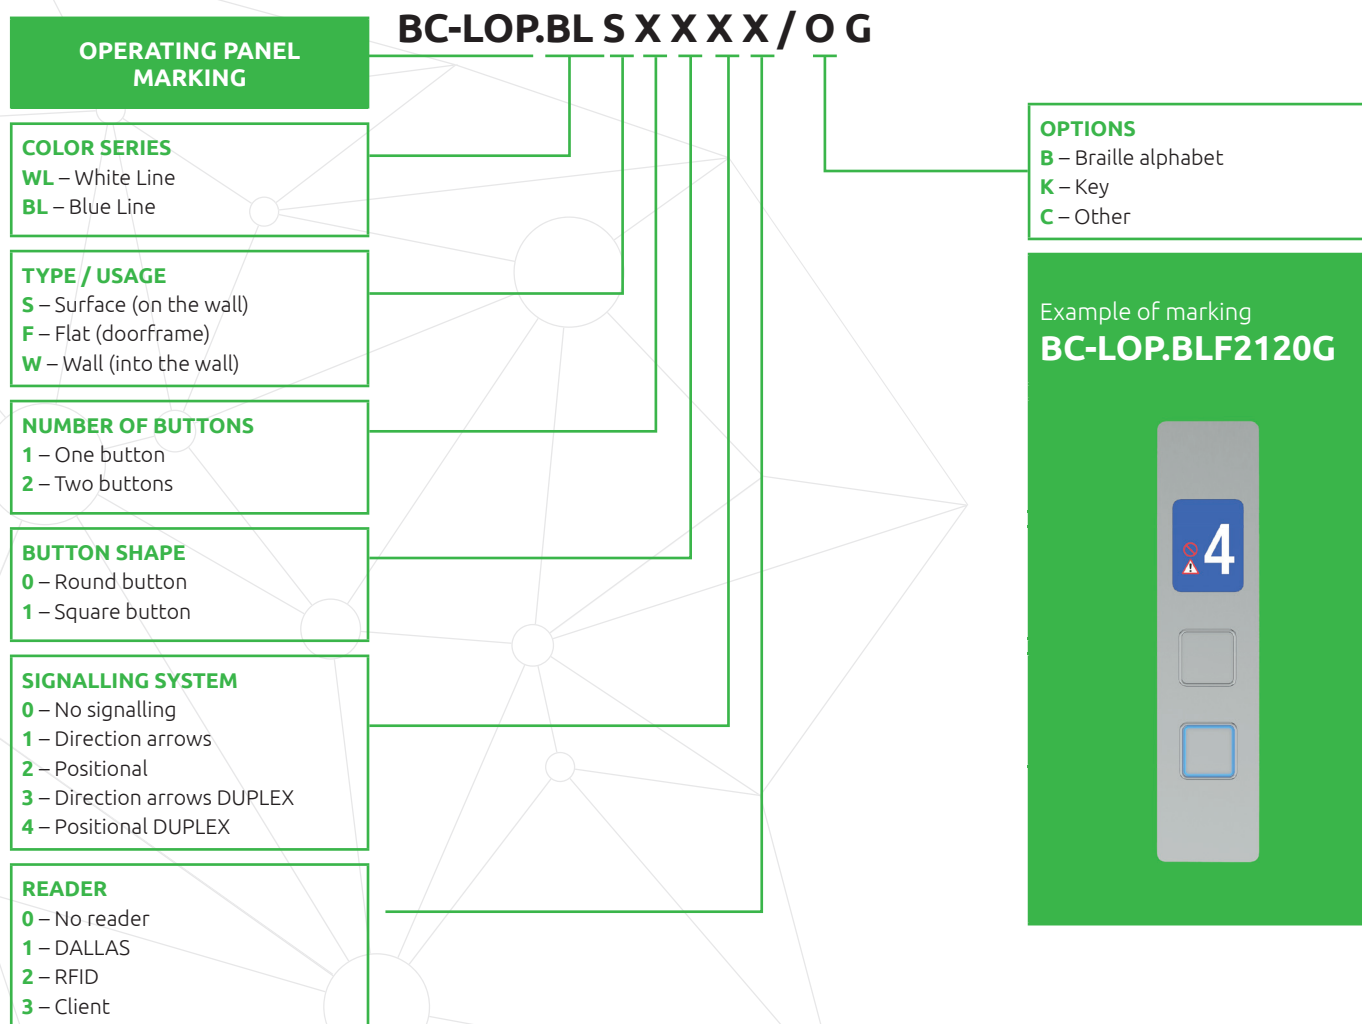

BETACONTROL

Beta Control s.r.o.
Černého 829/58, 635 00 Brno-Bystrc
Czech Republic

www.betacontrol.eu
obchod@betacontrol.cz



Co-funded by
the European Union



Landing operating panels **BC-LOP SLIM**

For our lift systems we offer operation panels of our own production in various designs according to the customer specification. You can combine the most suitable type for your order according to your own concept.

Basic division

- by type: surface, flat, wall- by backlight
- colours: blue line and white line
- variable combination of control components on the caller (button, RFID reader, Dallas reader, key)

Configuration Options

Customers can themselves specify their own requirements according to the type marking outlined below.

Examples of standardly supplied operating panels SLIM




Technical data of the operating panels



Type / Usage	Dimensions var. 1-2 combination of control com- ponents (height, width, depth, mm)	Dimension var. 3 combination of control com- ponents (height, width, depth, mm)	Material	Dimensions of the installation hole (mm)	Installation method	Screw pacing (mm)
Wall mounted SLIM	216 × 70 × 16,5 220 × 150 × 17 (Duplex slim)	266 × 70 × 16,5	brushed/polished stainless steel	no	surface mounting of the operating panel of the bracket	drilling template for mounting included

Type marking of the operating panels SLIM

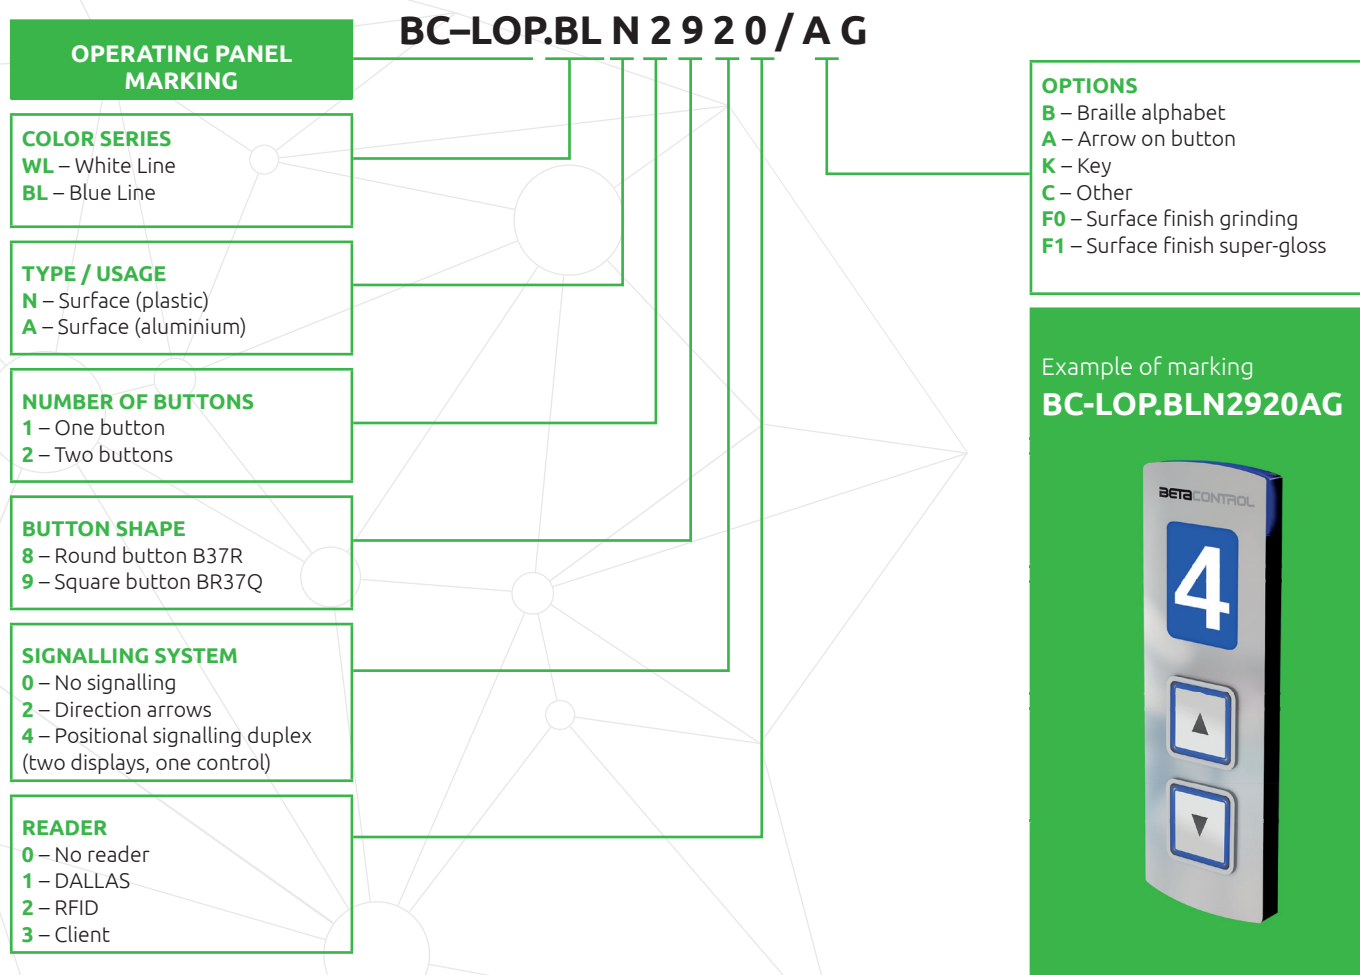

BETA CONTROL

Beta Control s.r.o.
Cerného 829/58, 635 00 Brno-Bystrc
Czech Republic

www.betacontrol.eu
obchod@betacontrol.cz



Co-funded by
the European Union

Lifts



Landing indicator and directional panel **BC-LIP**

For our lift systems we offer landing indicator and directional panels of our own production in various designs according to the customer specification. You can combine the most suitable type for your order according to your own concept.

Basic division


- by type: surface, flat, wall
- by backlight colours: blue line and white line

Configuration Options

Customers can themselves specify their own requirements according to the type marking outlined below.

Examples of standardly supplied landing indicator and directional panels

BLUE LINE

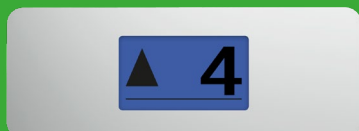

BC-LIP.BLF2/S3




BC-LIP.BLS4



BC-LIP.BLF1

SLIM LINE



BC-LIP.XLN2-S3



BC-LIP.XLN4

WHITE LINE



BC-LIP.WLF2/S3



BC-LIP.WLF4



BC-LIP.WLF1



BC-LIP.XLN1

BETACONTROL

Beta Control s.r.o.
Cerného 829/58, 635 00 Brno-Bystrc
Czech Republic

www.betacontrol.eu
obchod@betacontrol.cz

Technical data of the landing indicator and directional panels



Type / Usage	Dimensions – directional panel (height,width, length; mm)	Dimensions – landing indicator panel (height,width, length; mm)	Material	Dimensions of the installation hole (mm)	Installation method	Screw pacing (mm)
Wall SLIM	216 x 70 x 16,5	233 x 103 x 20,5	brushed/polished stainless steel	no	surface mounting of the operating panel of the bracket	no
Doorframe	200 x 60 x 2	110 x 300 x 2	1.4301 AISI 304 2G (GRADE 180), ground stainless steel; grinding degree 180, stainless steel SUPER GLOSS	directional panel 155 x 50 x 40 landing indicator panel 100 x 200 x 40	mounting to the doorframe by means of nuts M4	directional panel 170 landing indicator panel 224
To the wall	200 x 60 x 2	110 x 300 x 2	1.4301 AISI 304 2G (GRADE 180), ground stainless steel; grinding degree 180, stainless steel SUPER GLOSS	directional panel 155 x 50 x 40 landing indicator panel 100 x 200 x 40	mounting the bricked box by screws M4x15	directional panel 170 landing indicator panel 224

Type marking of the landing indicator panels

OPERATING PANEL MARKING

COLOR DESIGN
BL – Blue Line
WL – White Line
CL – Custom Line (custom design, other than catalogue design, previously e.g. red)

MONTÁŽ
S – Surface (on the wall)
F – Flat (doorframe)
W – Wall (into the wall)

SIGNALLING SYSTEM
0 – No signalling
1 – Direction arrows
2 – Positional
3 – Direction arrows DUPLEX
4 – Positional DUPLEX

BC-LIP.xL y a s

DISPLAY SIZE
S3 – 5" displej
S4 – 3" displej

Example of marking
BC-LIP.XLN2-S3

BETACONTROL

Beta Control s.r.o.
Cerného 829/58, 635 00 Brno-Bystrc
Czech Republic

www.betacontrol.eu
obchod@betacontrol.cz



Co-funded by
the European Union