



Landing operating panels **BC-LOP**

For our lift systems we offer operation panels of our own production in various designs according to the customer specification. You can combine the most suitable type for your order according to your own concept


Basic division

- by type: surface, flat, wall- by backlight
- colours: blue line and white line
- other specifications: display type, number of buttons, etc.

Configuration Options

Customers can themselves specify their own requirements according to the type marking outlined below.

Examples of standardly supplied operating panels

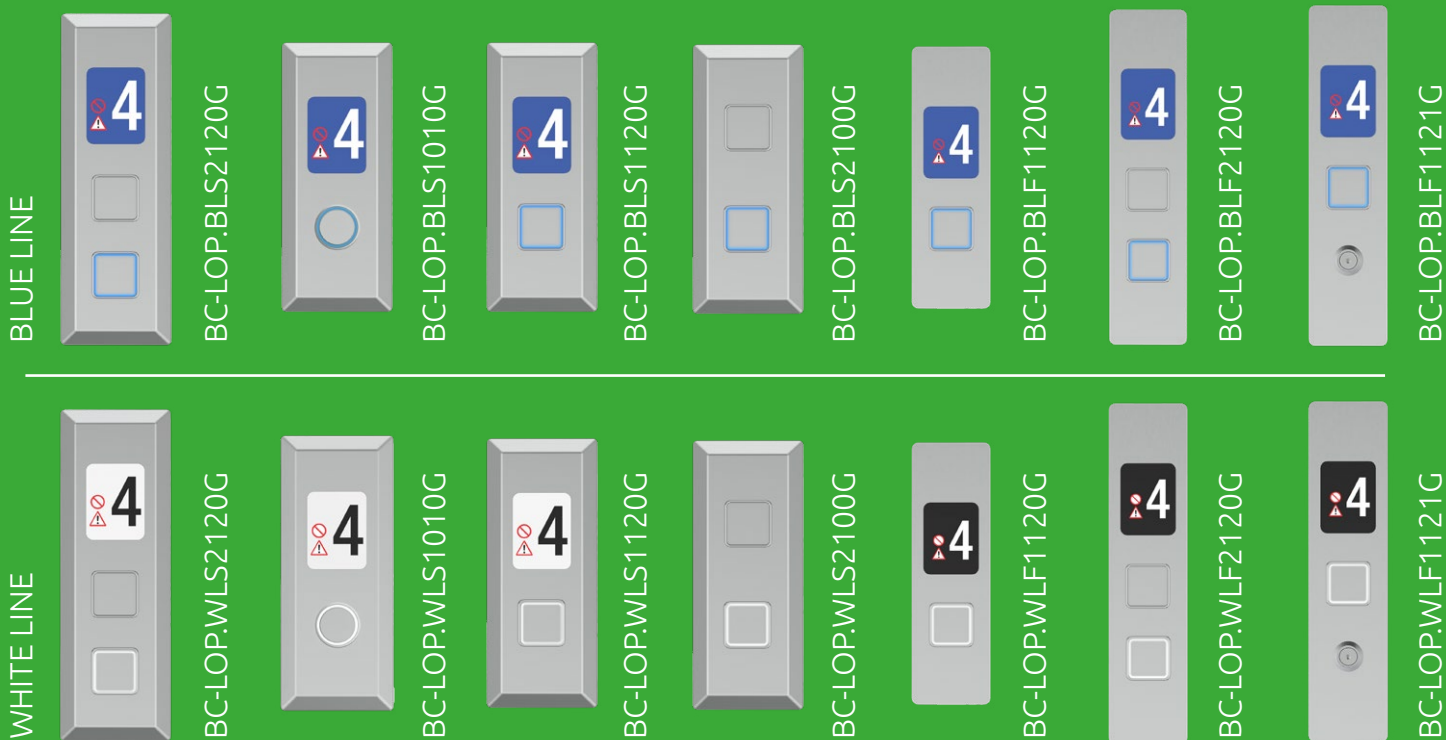


Technical data of the operating panels



Type / Usage	Dimensions var. 1thickness + display (height, width, length; mm)	Dimensions var. 2thickness + display (height, width, length; mm)	Material	Dimensions of the installation hole (mm)	Installation method	Screw pacing (mm)
Wall	193 x 79 x 27	264 x 79 x 27	1.4301 AISI 304, stainless steel, surface finish BALOTINA	no	Surface mounting of the operating panel of the bracket	no
Doorframe	200 x 60 x 2	200 x 60 x 2	1.4301 AISI 304 2G (GRADE 180), ground stainless steel; grinding degree 180	135 x 52 x 40	Mounting to the doorframe by means of nuts M4	150
To the wall	200 x 60 x 2	200 x 60 x 2	1.4301 AISI 304 2G (GRADE 180), ground stainless steel; grinding degree 180	135 x 52 x 40	Mounting the bricked box by screws M4x16	150

Type marking of the operating panels

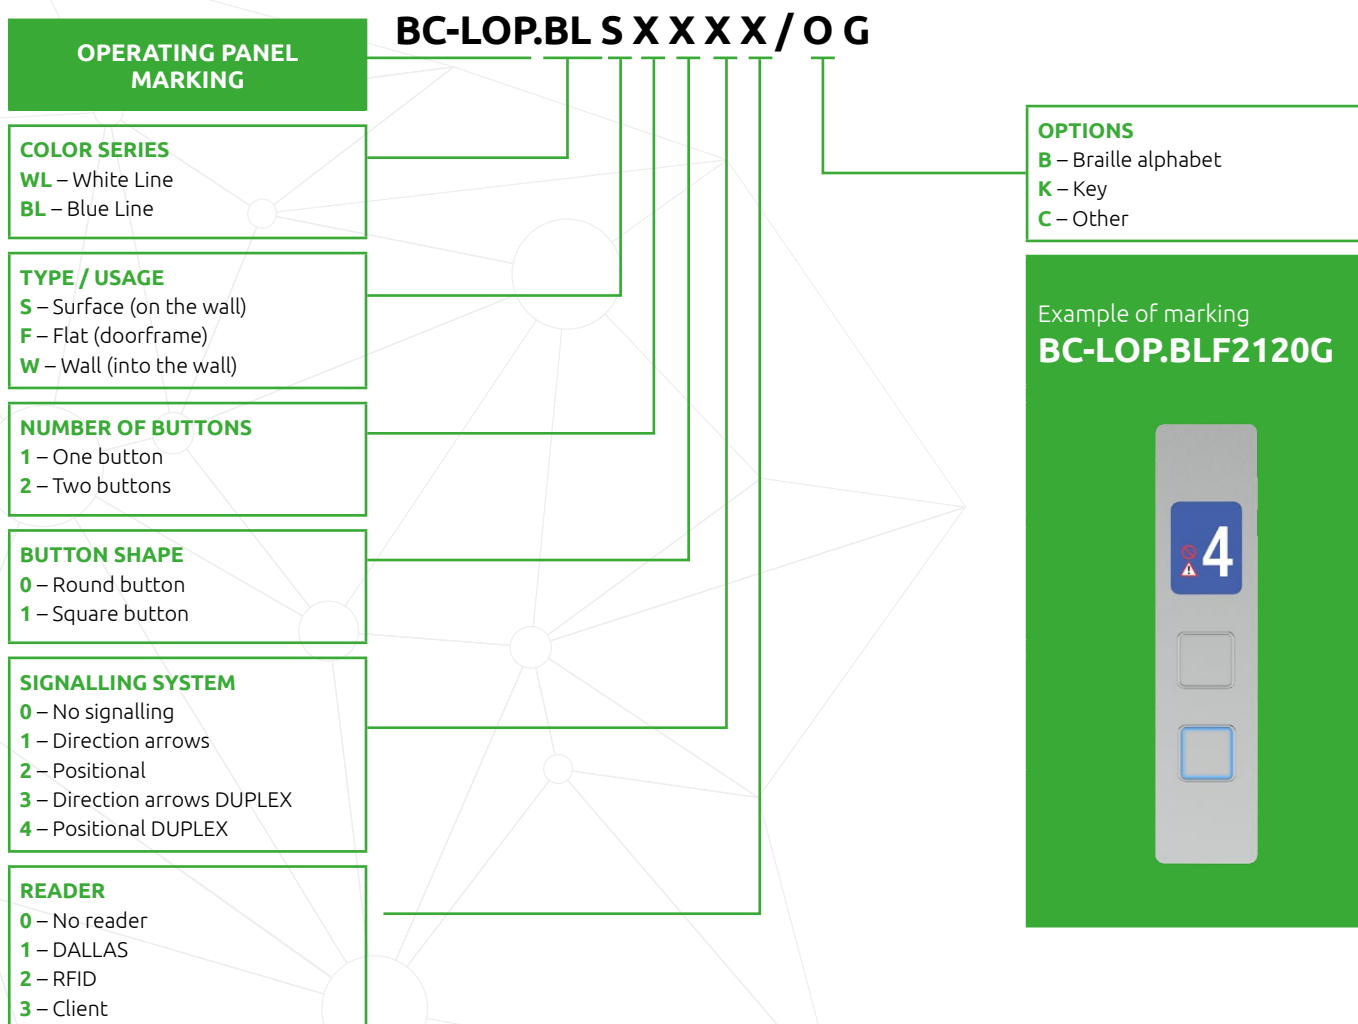

BETACONTROL

Beta Control s.r.o.
Černého 829/58, 635 00 Brno-Bystrc
Czech Republic

www.betacontrol.eu
obchod@betacontrol.cz



EUROPEAN UNION
European Regional Development Fund
Operational Programme Enterprise
and Innovations for Competitiveness