

Lifts



## Landing operating panels **BC-LOP SLIM**

For our lift systems we offer operation panels of our own production in various designs according to the customer specification. You can combine the most suitable type for your order according to your own concept.

### Basic division

- by type: surface, flat, wall- by backlight
- colours: blue line and white line
- variable combination of control components on the caller (button, RFID reader, Dallas reader, key)

### Configuration Options

Customers can themselves specify their own requirements according to the type marking outlined below.

### Examples of standardly supplied operating panels SLIM



BC-LOP.WLN2840G



BC-LOP.WLN1820G



BC-LOP.WLN1821G



BC-LOP.WLN1921G



BC-LOP.WLN2820AG



BC-LOP.WLN2920AG



BC-LOP.WLN1820KKG



BC-LOP.WLN1921KG



BC-LOP.BLN1940G



BC-LOP.BLN1920G



BC-LOP.BLN1821G



BC-LOP.BLN1921G



BC-LOP.BLN2820AG



BC-LOP.BLN2920AG



BC-LOP.BLN2820AKG



BC-LOP.BLN2921AG

**BETACONTROL**

Beta Control s.r.o.  
Cerneho 829/58, 635 00 Brno-Bystrc  
Czech Republic


[www.betacontrol.eu](http://www.betacontrol.eu)  
[obchod@betacontrol.cz](mailto:obchod@betacontrol.cz)

# Technical data of the operating panels



Type / Usage	Dimensions var. 1-2 combination of control com- ponents (height, width, depth, mm)	Dimension var. 3 combination of control com- ponents (height, width, depth, mm)	Material	Dimensions of the installation hole (mm)	Installation method	Screw pacing (mm)
<b>Wall mounted SLIM</b>	216 × 70 × 16,5 220 × 150 × 17 (Duplex slim)	266 × 70 × 16,5	brushed/polished stainless steel	no	surface mounting of the operating panel of the bracket	drilling template for mounting included

## Type marking of the operating panels SLIM

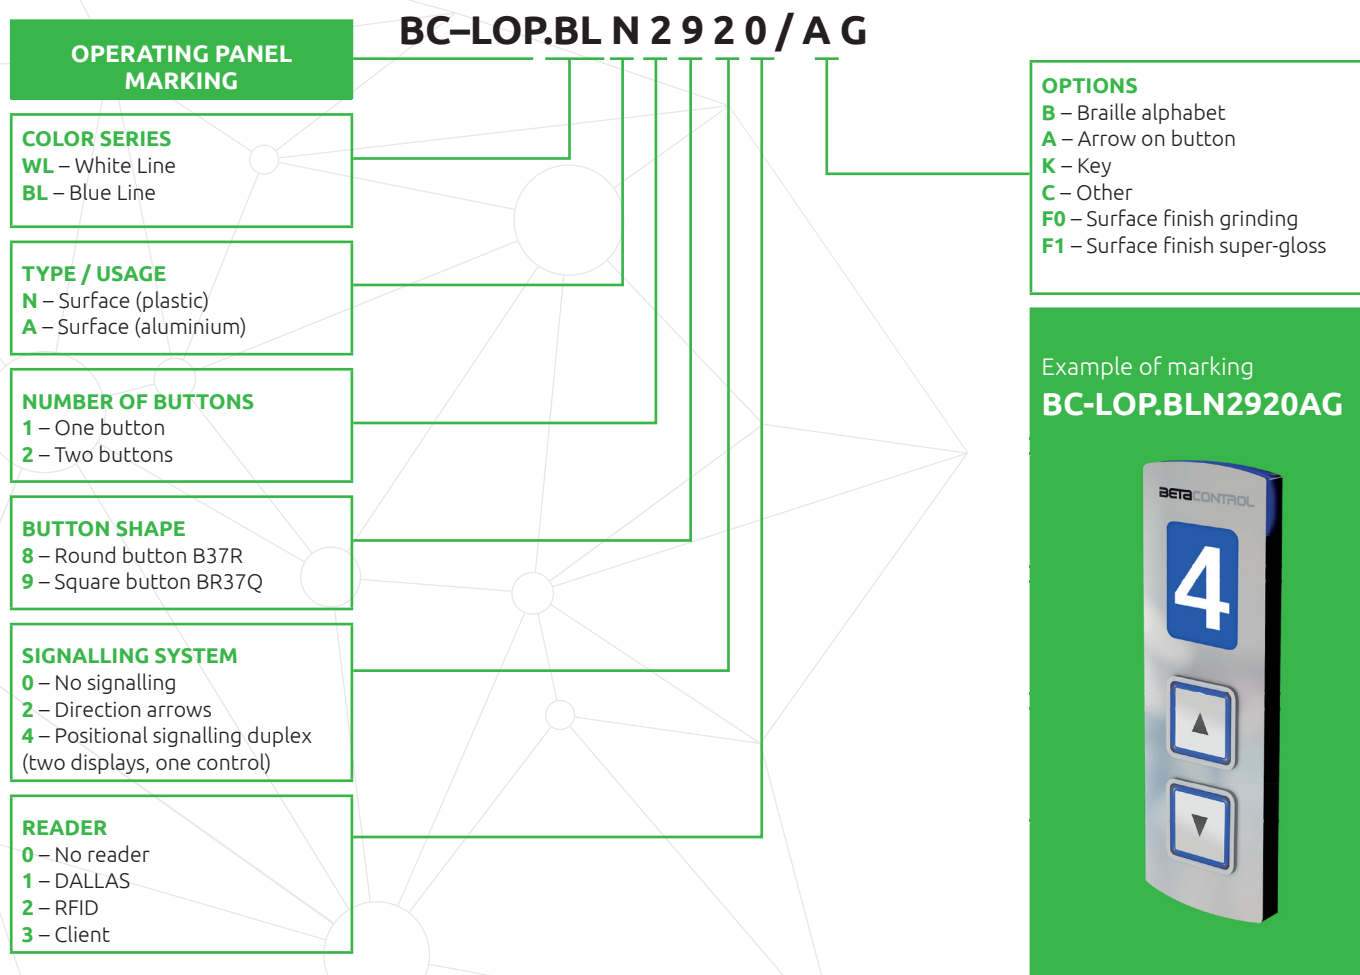

**BETACONTROL**

Beta Control s.r.o.  
Cerného 829/58, 635 00 Brno-Bystrc  
Czech Republic

[www.betacontrol.eu](http://www.betacontrol.eu)  
[obchod@betacontrol.cz](mailto:obchod@betacontrol.cz)



Co-funded by  
the European Union