



## Landing operating panels **BC LOP**

For our lift systems we offer operation panels of our own production in various designs according to the customer specification. You can combine the most suitable type for your order according to your own concept



### Basic division

- by type: surface, flat, wall- by backlight
- colours: blue line and white line
- other specifications: display type, number of buttons, etc.

### Configuration Options

Customers can themselves specify their own requirements according to the type marking outlined below.

### Examples of standardly supplied operating panels

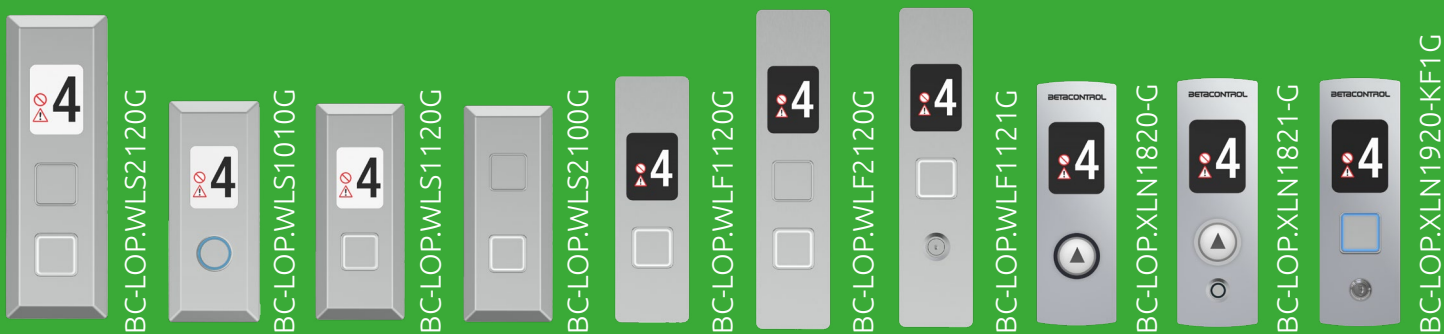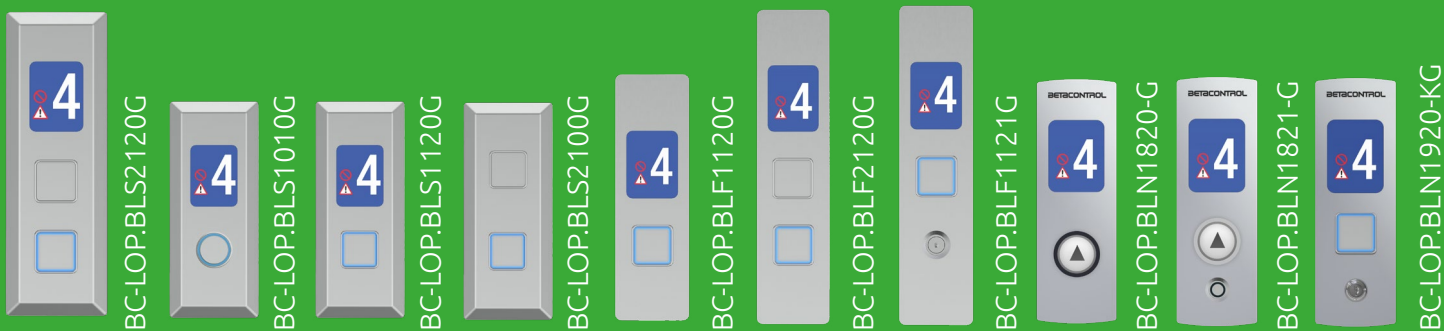


# Technical data of the operating panels



Type / Usage	Dimensions var. 1thickness + display (height, width, length; mm)	Dimensions var. 2thickness + display (height, width, length; mm)	Material	Dimensions of the installation hole (mm)	Installation method	Screw pacing (mm)
<b>Wall</b>	193 x 79 x 27	264 x 79 x 27	1.4301 AISI 304, stainless steel, surface finish BALOTINA	no	Surface mounting of the operating panel of the bracket	no
<b>Doorframe</b>	200 x 60 x 2	200 x 60 x 2	1.4301 AISI 304 2G (GRADE 180), ground stainless steel; grinding degree 180	135 x 52 x 40	Mounting to the doorframe by means of nuts M4	150
<b>To the wall</b>	200 x 60 x 2	200 x 60 x 2	1.4301 AISI 304 2G (GRADE 180), ground stainless steel; grinding degree 180	135 x 52 x 40	Mounting the bricked box by screws M4x16	150

## Type marking of the operating panels

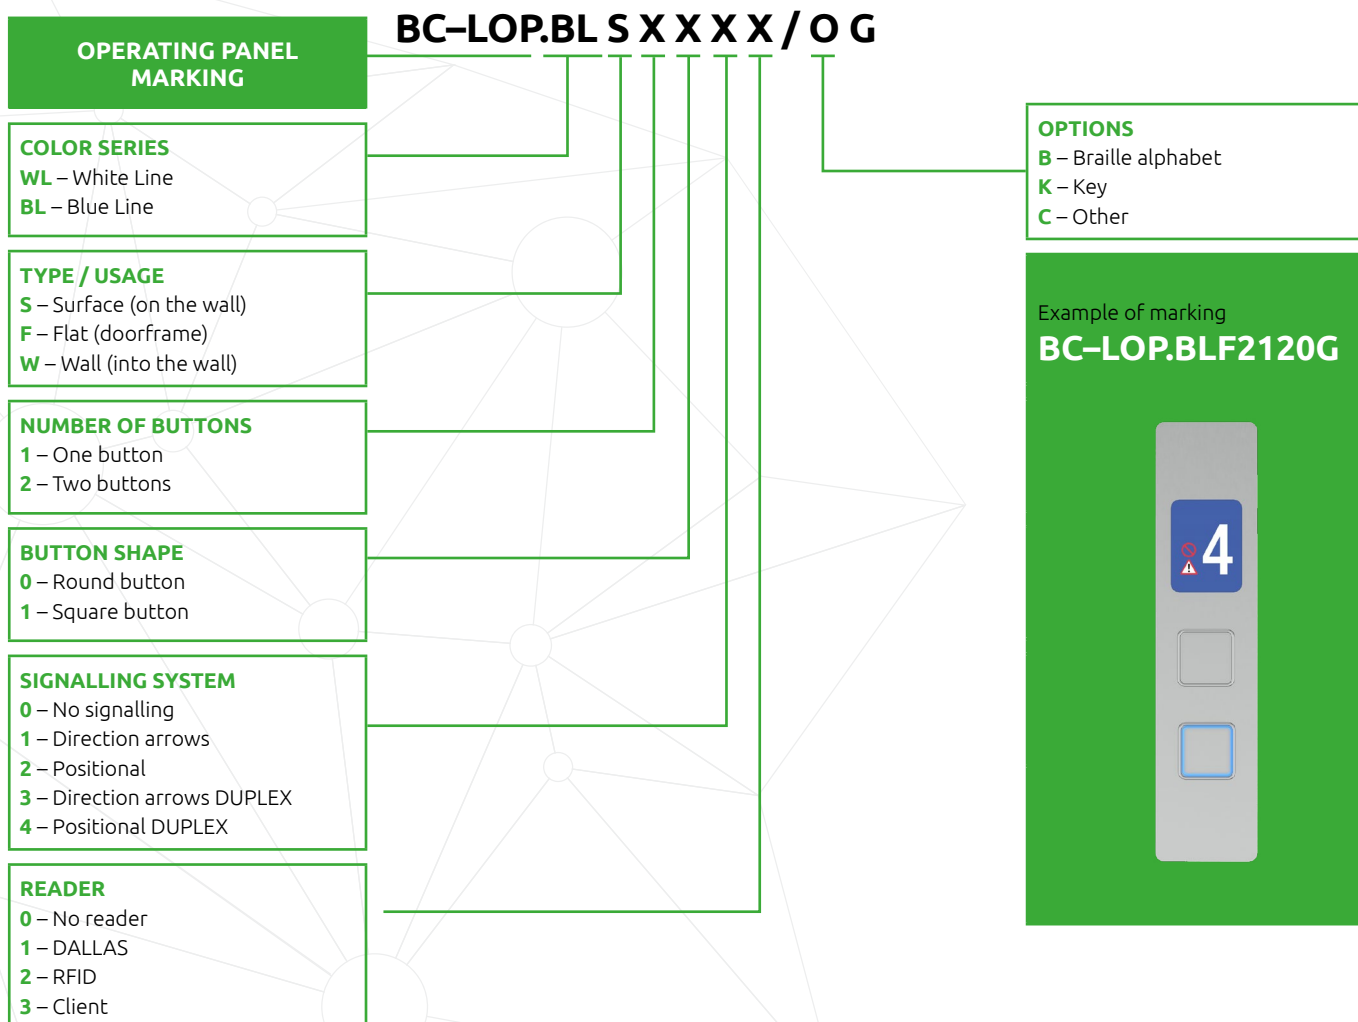

**BETACONTROL**

Beta Control s.r.o.  
Černého 829/58, 635 00 Brno-Bystrc  
Czech Republic

[www.betacontrol.eu](http://www.betacontrol.eu)  
[obchod@betacontrol.cz](mailto:obchod@betacontrol.cz)



EUROPEAN UNION  
European Regional Development Fund  
Operational Programme Enterprise  
and Innovations for Competitiveness